


PH 3/2 AGED BRASS OPAL TABLE LAMP


PH 3/2 Aged Brass Opal Table Lamp - 5744165617

The PH 3/2 Aged Brass Opal Table Lamp is based on Poul Henningsen's reflective three-shade system. It's characterised by its aged brass top shade and white-painted inner side, providing pleasing downward-directed, glare-free illumination. The middle and lower shades are crafted from three-layered, mouth-blown opal white glass, which is glossy outside and sandblasted matte on the inner side and provides a softer, more uniform light distribution, creating further ambience.



Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.

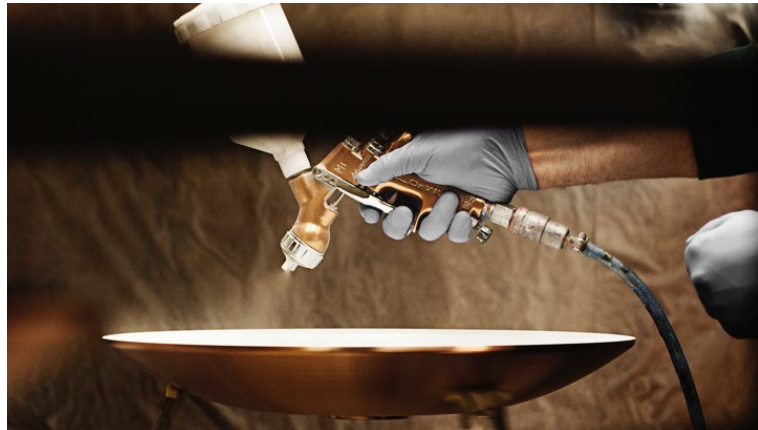

PH 3/2 Aged Brass Opal Table Lamp

Product info

Mounting

2.5 m. Black textile cord. Through-switch.

Finish

Aged brass with fine hairlines, lacquered. Three-layered mouth-blown opal glass with sandblasted matt inner side.

Materials

Top shade: Aged brass, with hairlines and lacquered.
 Glass shades: Mouth-blown three-layered opal glass. Glossy on the outside, sandblasted on the inner side.
 Stem: Aged brass, with hairlines and lacquered to preserve finish.

Sizes and weights

width x Height x Length (mm) | 285 x 455 x 285 Max 2.4 kg

Class

Ingress protection IP20. Electric shock protection II w/o ground.

Light source

1x40W E14

Related products



PH 5



PH 3/2 Table Lamp



PH 3/2 Pendant



PH 3/2 Academy



PH 3/2 Wall Lamp



PH 3/2 Pale Rose Table Lamp



PH 3/2 Aged Brass Table Lamp



PH 2/2 Luna Aged Brass Opal Table Lamp




PH 3/3 Aged Brass Opal Pendant




PH 3/2 Dusty Terracotta Table Lamp

Light distribution diagrams


Cartesian

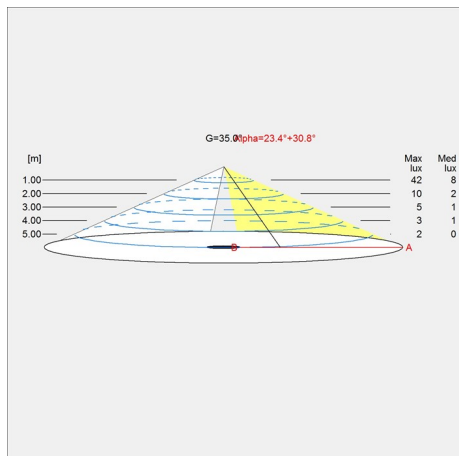

Isolux

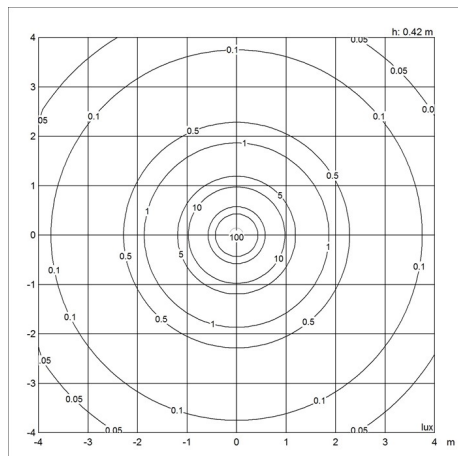

Polar

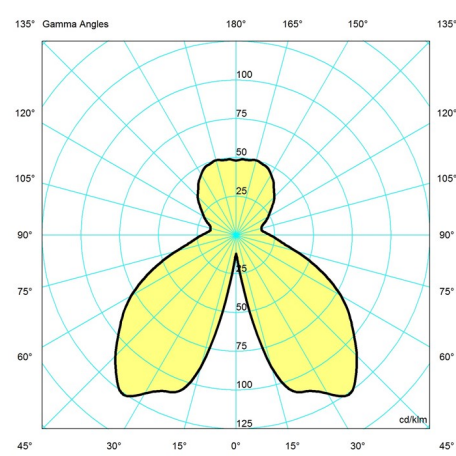

Data specifications

Colour	Aged brass/opal glass
Width	285
Built-in Height	-
Class	II
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-
Watt	5.0
Light control	-
UGR Transversal / Axial	6.2/6.2
Driver life	-

Length	285
Height	455
IP class	20
Net Weight	2.4
Power Factor (P = 100 % / P = 50 %)	-
Light source	1x40W E14
CRI	-
Lumen	298
Efficacy	60
Min. Dim Level (%)	-
L80B50 (hours)	-