


Luminaire		Measurem.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	
Round Luminaire	Diam.	320 mm	Height	60 mm	
Round Luminous Area	Diam.	320 mm	Height	0 mm	
Horizontal Luminous Area	0.080425 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.019457 m2	
Symmetry Type	Double Symmetrical	Maximum Gamma Angle	90		
Measurement Distance	6.44	Measurement Flux	350.26 lm		
Operator	Asselum T2	Source voltage	230.00 V		
Temperature	20.00 °C	Source current			
Humidity	42.00 %	Photocell	Prc		
Notes					

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
- MARSET	GINGER 32 NEW	Lámpara led blanco 9.4W	350.26	9.00	1	
C.I.E.	40 72 95 100 100	D DIN 5040				
F UTE	1.00 G	B NBN				
		A20				
		BZ 5				


Diam=320mm



C Halfplanes

180.0 — 0.0
270.0 — 90.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

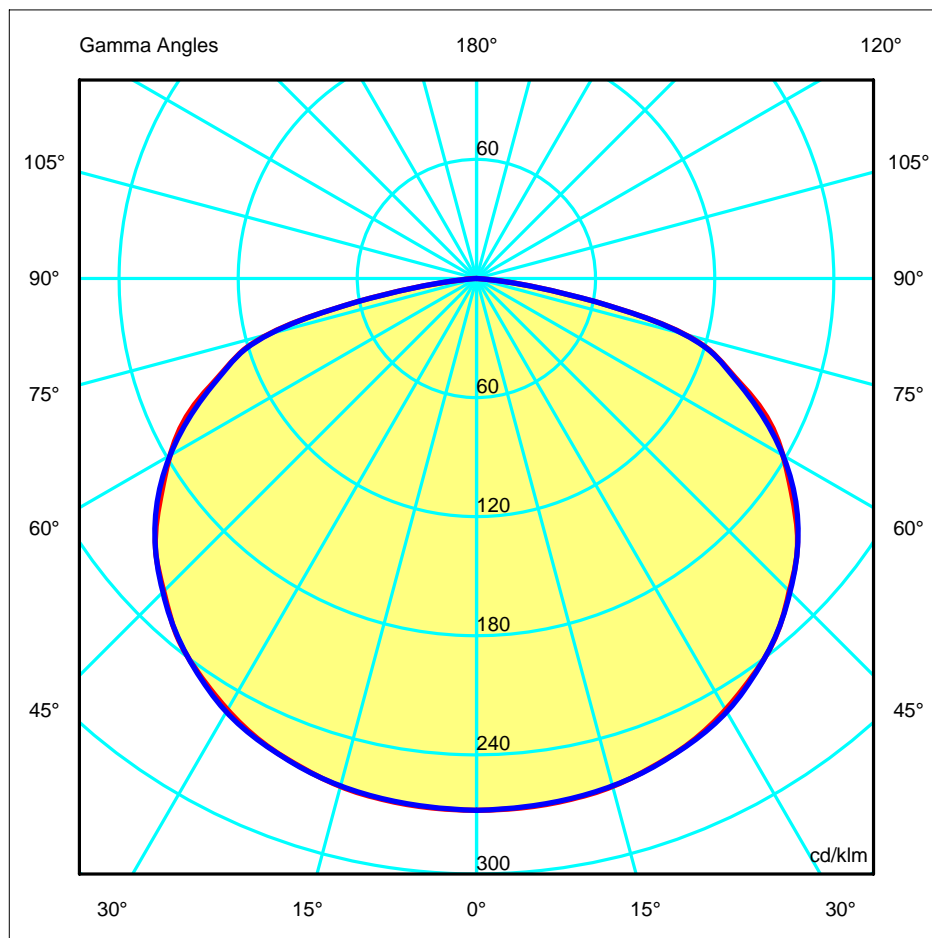



Luminaire		Measur.		Lamp			
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW		
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1		
Line	- MARSET	Date	11-02-2015	Position	Universal		
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm		
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical			
<div><div>Luminous Intensity Table cd/klm</div><div>Table 1/1</div></div>							
	C 0.00	C 15.00	C 30.00	C 45.00	C 60.00	C 75.00	C 90.00
G 0.0	267.86	267.86	267.86	267.86	267.86	267.86	267.86
G 5.0	267.65	267.66	267.70	267.84	267.51	267.54	267.30
G 10.0	266.70	266.38	266.90	266.84	266.59	266.68	266.24
G 15.0	264.92	264.62	265.34	265.00	265.00	265.01	264.70
G 20.0	261.34	261.12	262.32	261.85	261.89	261.69	261.52
G 25.0	257.10	257.00	258.36	257.57	257.67	257.54	257.49
G 30.0	250.80	251.14	252.31	251.70	251.69	251.64	252.10
G 35.0	243.37	243.07	245.06	243.87	244.02	243.95	243.90
G 40.0	234.89	234.27	236.30	234.62	235.19	234.88	234.68
G 45.0	222.76	222.57	224.75	223.54	223.38	223.08	223.29
G 50.0	211.05	210.62	213.06	210.91	211.58	211.00	211.14
G 55.0	194.49	195.04	196.94	195.72	196.26	195.80	196.37
G 60.0	178.18	177.77	180.59	177.85	178.22	177.79	178.24
G 65.0	159.87	157.95	160.87	157.25	157.40	157.01	156.82
G 70.0	135.33	134.81	137.55	134.85	134.84	134.37	134.68
G 75.0	108.72	107.52	112.08	105.91	106.36	105.97	107.83
G 80.0	48.66	50.44	54.60	51.51	48.59	49.60	48.66
G 85.0	6.87	7.01	8.66	6.92	5.76	7.07	6.04
G 90.0	1.70	1.65	1.81	1.70	1.66	1.64	1.54

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=320mm


C Halfplanes

180.0 — 0.0
270.0 — 90.0

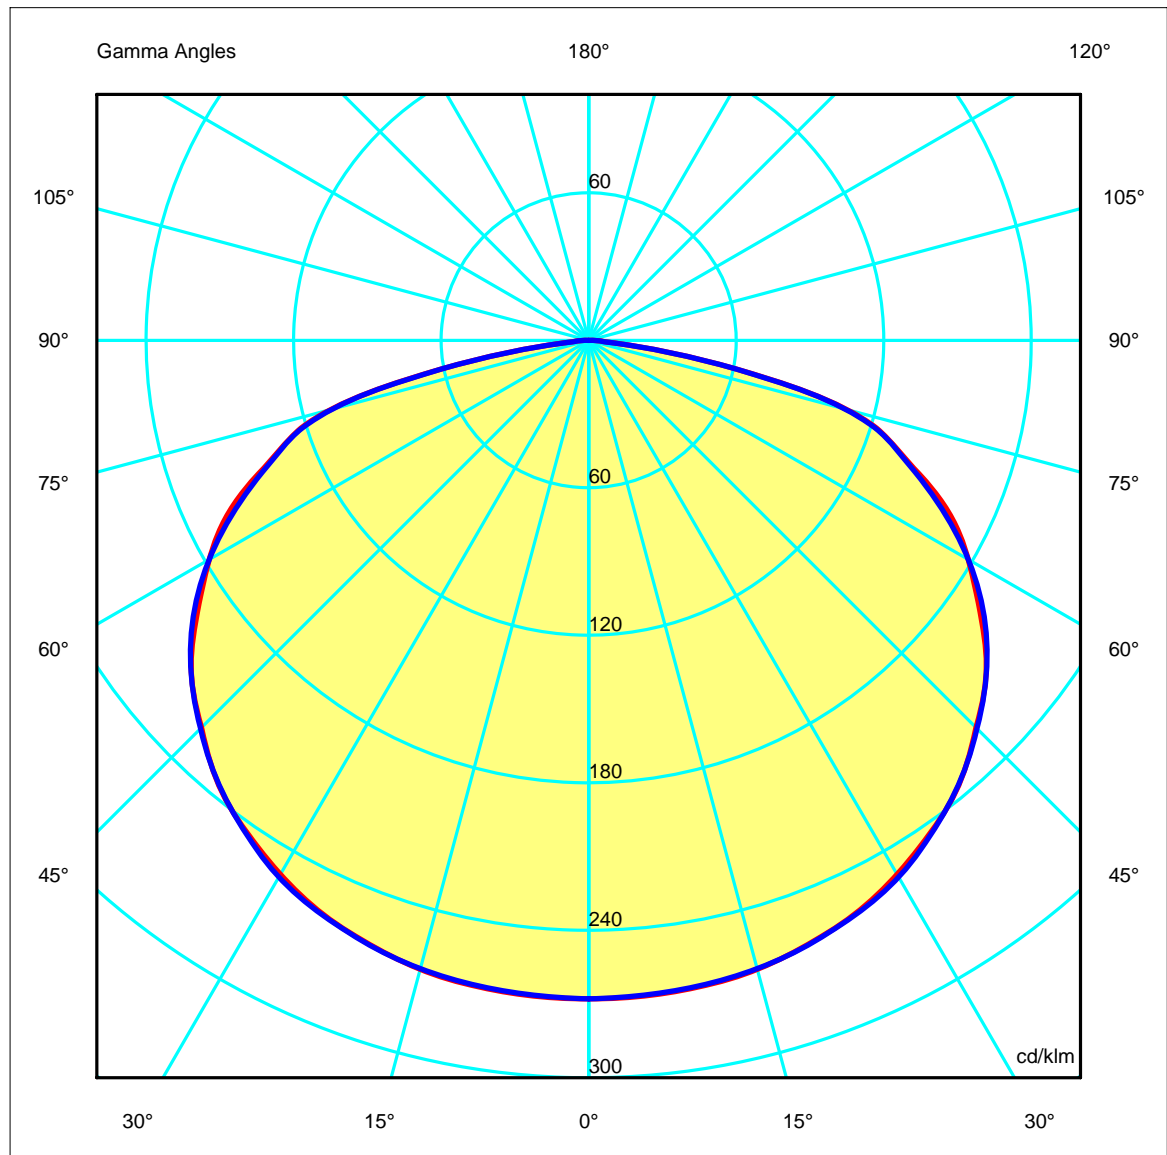


Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Diam=320mm



C Halfplanes

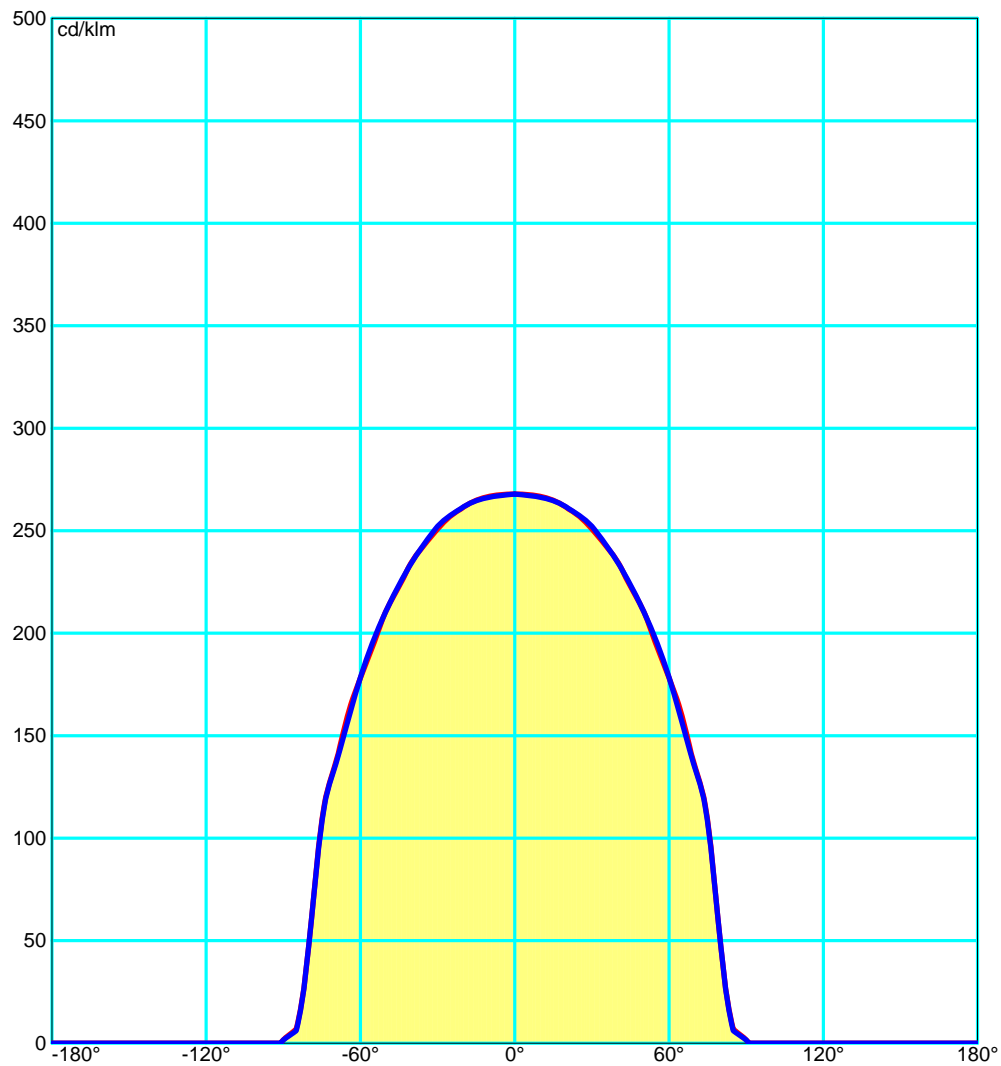

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions										
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	14.2	15.7	14.5	15.9	16.1	14.2	15.6	14.5	15.9	16.1
x=2H y=3H	16.5	17.8	16.9	18.1	18.3	16.5	17.8	16.8	18.1	18.3
x=2H y=4H	17.6	18.9	18.0	19.1	19.4	17.6	18.8	17.9	19.1	19.4
x=2H y=6H	18.2	19.4	18.6	19.7	19.9	18.2	19.3	18.5	19.6	19.9
x=2H y=8H	18.3	19.4	18.6	19.7	20.0	18.2	19.3	18.6	19.7	20.0
x=2H y=12H	18.3	19.3	18.6	19.7	20.0	18.2	19.3	18.6	19.6	20.0
x=4H y=2H	15.2	16.5	15.6	16.8	17.0	15.2	16.5	15.5	16.7	17.0
x=4H y=3H	17.7	18.8	18.1	19.1	19.4	17.7	18.7	18.0	19.1	19.4
x=4H y=4H	18.9	19.9	19.3	20.2	20.5	18.8	19.8	19.3	20.2	20.5
x=4H y=6H	19.6	20.4	20.0	20.8	21.1	19.5	20.3	19.9	20.7	21.1
x=4H y=8H	19.7	20.5	20.1	20.9	21.2	19.6	20.4	20.1	20.8	21.2
x=4H y=12H	19.7	20.4	20.2	20.8	21.2	19.6	20.3	20.1	20.7	21.2
x=8H y=4H	19.4	20.2	19.9	20.6	20.9	19.3	20.1	19.8	20.5	20.9
x=8H y=6H	20.2	20.8	20.7	21.3	21.6	20.1	20.7	20.6	21.1	21.6
x=8H y=8H	20.3	20.9	20.8	21.3	21.7	20.2	20.8	20.7	21.2	21.7
x=8H y=12H	20.3	20.8	20.8	21.3	21.7	20.2	20.7	20.7	21.2	21.7
x=12H y=4H	19.4	20.1	19.9	20.5	20.9	19.4	20.1	19.8	20.5	20.9
x=12H y=6H	20.2	20.8	20.7	21.2	21.6	20.1	20.7	20.6	21.1	21.6
x=12H y=8H	20.4	20.9	20.9	21.3	21.7	20.3	20.7	20.8	21.2	21.7

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Total Flux=350.26 Luminaire Flux=350.25

RI	0.60	0.80	1.00	1.25	1.50	2.00	2.50	3.00	4.00	5.00	10.00	20.00
DRR	0.25	0.34	0.41	0.48	0.54	0.63	0.70	0.74	0.80	0.84	0.92	0.96
RC	6	6	6	6	6	6	6	6	6	6	5	4


		Zonal Flux per 1000 Lumen																
Y°	10	20	30	40	50	60	70	80	90	100	110	120	130	140	150	160	170	180
ZF(Y)	26	100	219	372	545	720	876	982	1000	1000	1000	1000	1000	1000	1000	1000	1000	1000

CIE Flux Codes
40 72 95 100 100

C.I.E.
D DIN 5040
F UTE
B NBN
RN
BLF

6/6/6/6/6/6/6/6/5/4
A20
1.00 G
BZ 5
0.00000 %
1.0

LOR 99.99828 %
ULOR 0.00000 %
DLOR 99.99828 %
UFF 0.00000 %
DFF 100.00000 %
FFR 0.00000 %

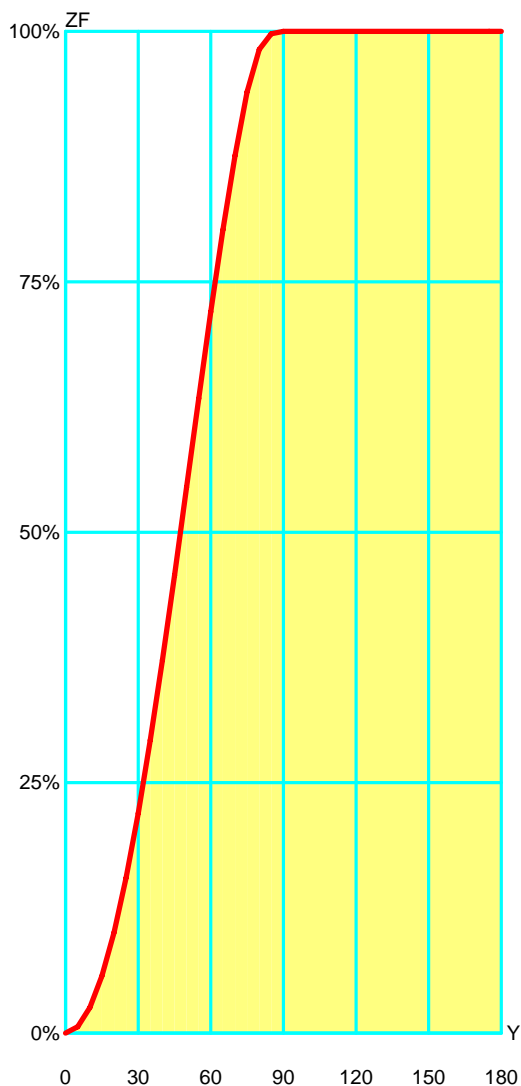


Zonal Flux				
Gamma °	Flux	Sum lm	Flux [%]	Sum [%]
0°	0.00	0.00	0.00%	0.00 %
5°	6.40	6.40	0.64 %	0.64 %
10°	19.11	25.51	1.91 %	2.55 %
15°	31.53	57.05	3.15 %	5.70 %
20°	43.41	100.45	4.34 %	10.05 %
25°	54.46	154.92	5.45 %	15.49 %
30°	64.44	219.36	6.44 %	21.94 %
35°	72.98	292.34	7.30 %	29.23 %
40°	79.91	372.25	7.99 %	37.23 %
45°	84.88	457.13	8.49 %	45.71 %
50°	87.85	544.98	8.79 %	54.50 %
55°	88.55	633.53	8.85 %	63.35 %
60°	86.51	720.04	8.65 %	72.00 %
65°	81.81	801.85	8.18 %	80.19 %
70°	74.28	876.13	7.43 %	87.61 %
75°	63.50	939.63	6.35 %	93.96 %
80°	42.34	981.97	4.23 %	98.20 %
85°	15.64	997.61	1.56 %	99.76 %
90°	2.37	999.98	0.24 %	100.00 %
95°	0.00	999.98	0.00 %	100.00 %
100°	0.00	999.98	0.00 %	100.00 %
105°	0.00	999.98	0.00 %	100.00 %
110°	0.00	999.98	0.00 %	100.00 %
115°	0.00	999.98	0.00 %	100.00 %
120°	0.00	999.98	0.00 %	100.00 %
125°	0.00	999.98	0.00 %	100.00 %
130°	0.00	999.98	0.00 %	100.00 %
135°	0.00	999.98	0.00 %	100.00 %
140°	0.00	999.98	0.00 %	100.00 %
145°	0.00	999.98	0.00 %	100.00 %
150°	0.00	999.98	0.00 %	100.00 %
155°	0.00	999.98	0.00 %	100.00 %
160°	0.00	999.98	0.00 %	100.00 %
165°	0.00	999.98	0.00 %	100.00 %
170°	0.00	999.98	0.00 %	100.00 %
175°	0.00	999.98	0.00 %	100.00 %
180°	0.00	999.98	0.00 %	100.00 %

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.80	5.60	8.40	11.20	14.00	OC	2.78	5.55	8.33	11.11	13.88
OB	2.80	5.60	8.40	11.20	14.00	OD	2.78	5.55	8.33	11.11	13.88

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	93.82	93.75	92.79	90.05	85.24	78.02	68.12	56.00	38.08	2.41
OB	93.82	93.75	92.79	90.05	85.24	78.02	68.12	56.00	38.08	2.41
OC	93.82	93.62	92.71	90.19	85.43	78.21	68.78	54.93	37.77	2.12
OD	93.82	93.62	92.71	90.19	85.43	78.21	68.78	54.93	37.77	2.12

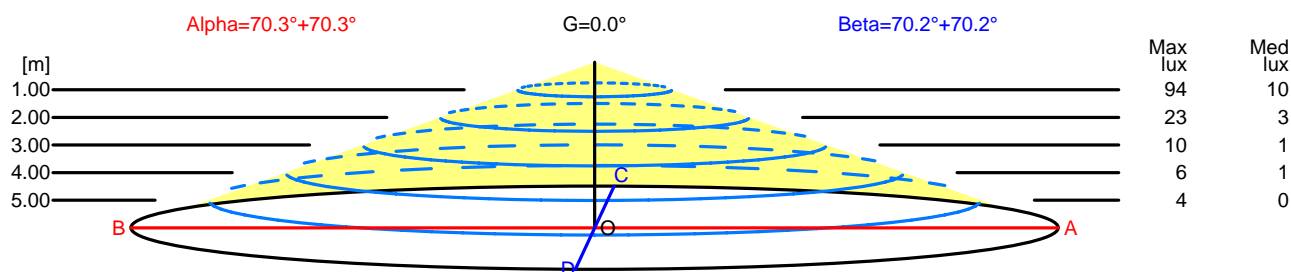


H[m]	D[m]	Max lux	Med lux	Alpha=70.3°+70.3°	G=0.0
1.00	5.60	94	10		
2.00	11.20	23	3		
3.00	16.80	10	1		
4.00	22.39	6	1		
5.00	27.99	4	0		

H[m]	D[m]	Max lux	Med lux	Beta=70.2°+70.2°	G=0.0
1.00	5.55	94	10		
2.00	11.11	23	3		
3.00	16.66	10	1		
4.00	22.21	6	1		
5.00	27.76	4	0		

Luminaire		Measurem.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Isolux (Floor)

Luminaire position X=0.00m Y=0.00m Z=2.50m

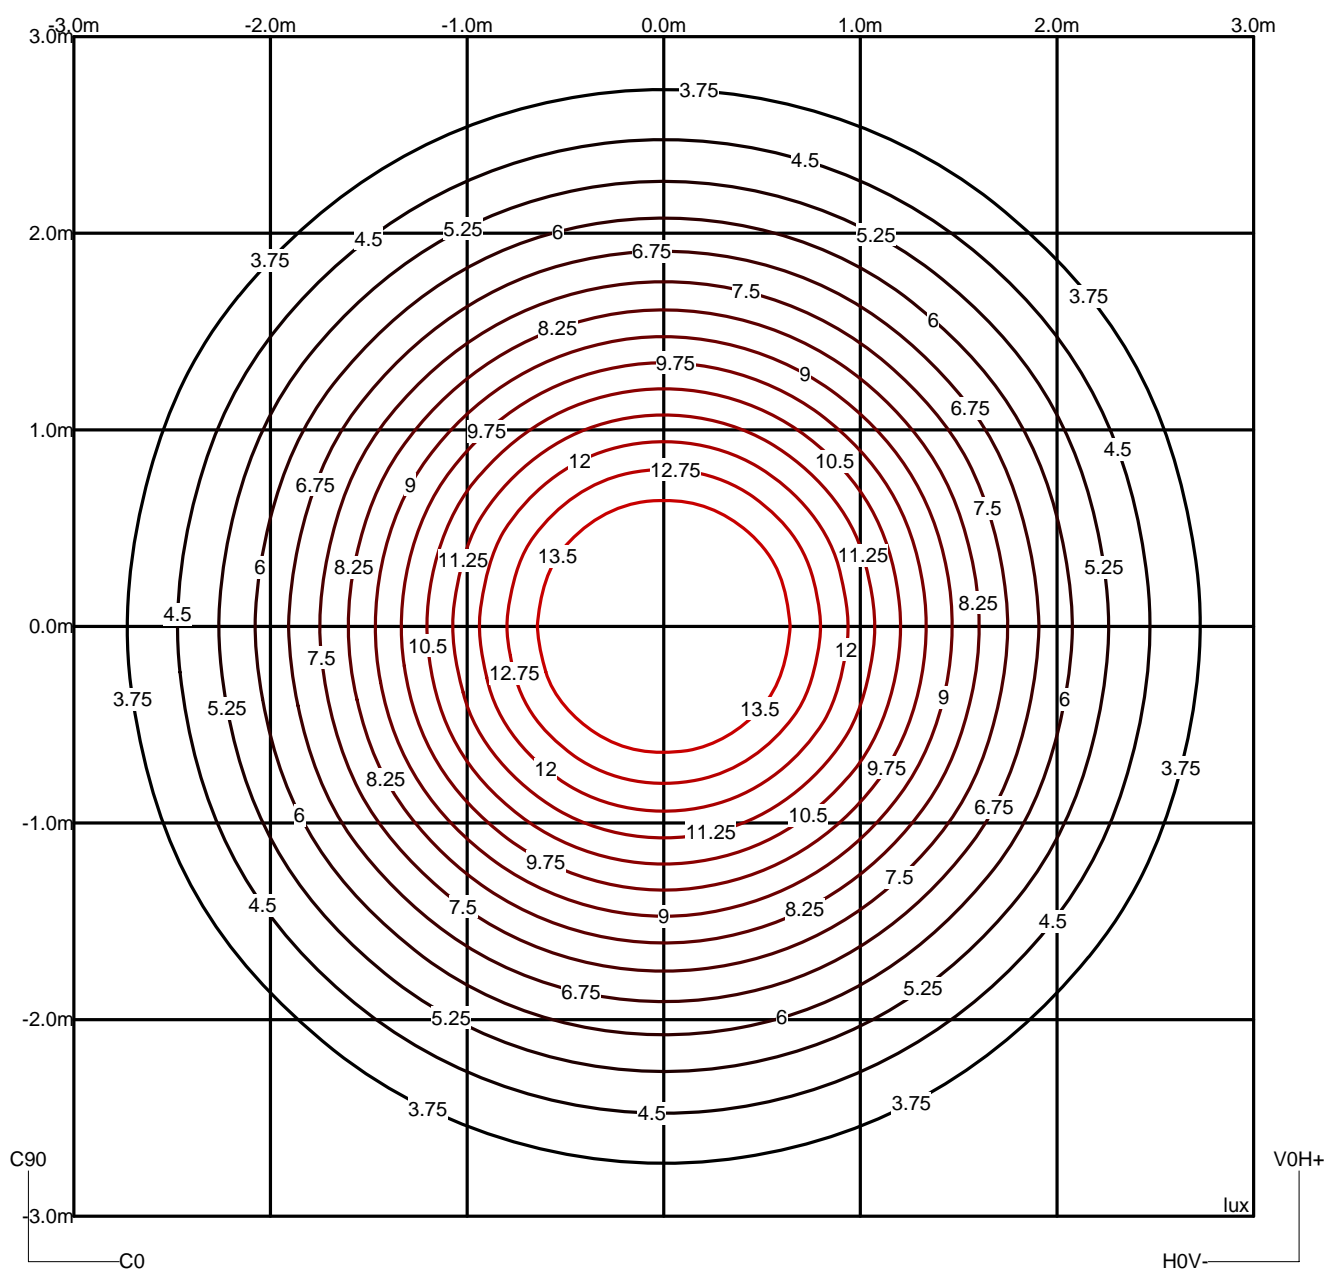

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Utilizations CIE

Mounting	Direct				Normalization				Normalised				Suspension Ratio				Standard CIE Settings			

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	


Average Luminance [cd/m²]										
0.0°	45°	50°	55°	60°	65°	70°	75°	80°	85°	
1372	1375	1430	1477	1552	1647	1723	1829	1220	343	---
90.0°				1553	1616	1715	1814	1220	302	---

Flush mounted or longitudinal view												
		Illumination(lx)										
A	A	2000	1000	750	500		<300					1.15
B	1		2000	1500	1000	750	500	<300				1.5
C					2000		1000	500	<300			1.85
D	2						2000	1000	500	<300		2.2
E	3							2000	1000	500	<300	2.55

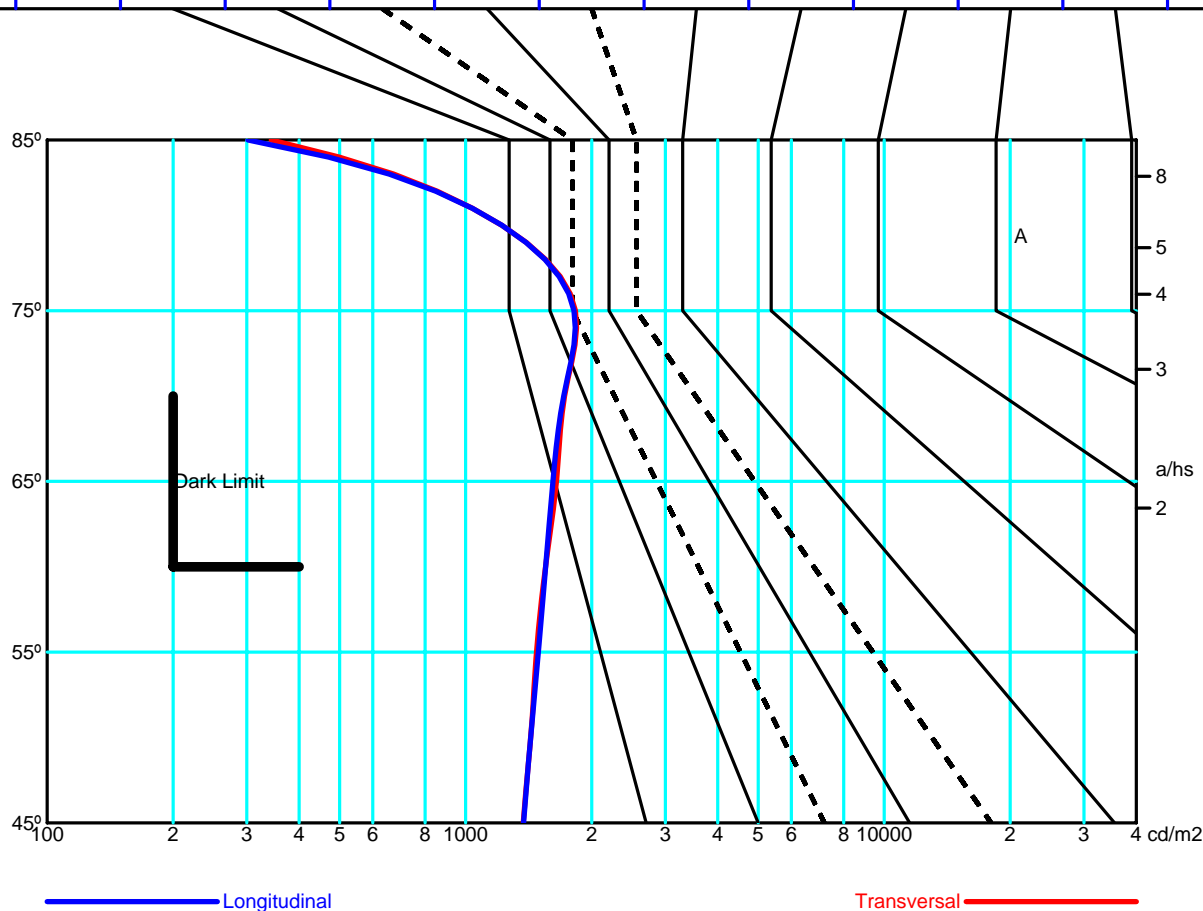

Luminaire		Measur.		Lamp	
Code	GINGER 32 NEW	Code	GINGER 32 NEW	Code	GINGER 32 NEW
Name	Colgante leds 9.4W 700mA	Name	Colgante leds 9.4W 700mA	Number	1
Line	- MARSET	Date	11-02-2015	Position	Universal
Efficiency	100.00%	Coordinate system	CG	Total Flux	350.26 lm
Maximum value	267.86 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	

Luminance

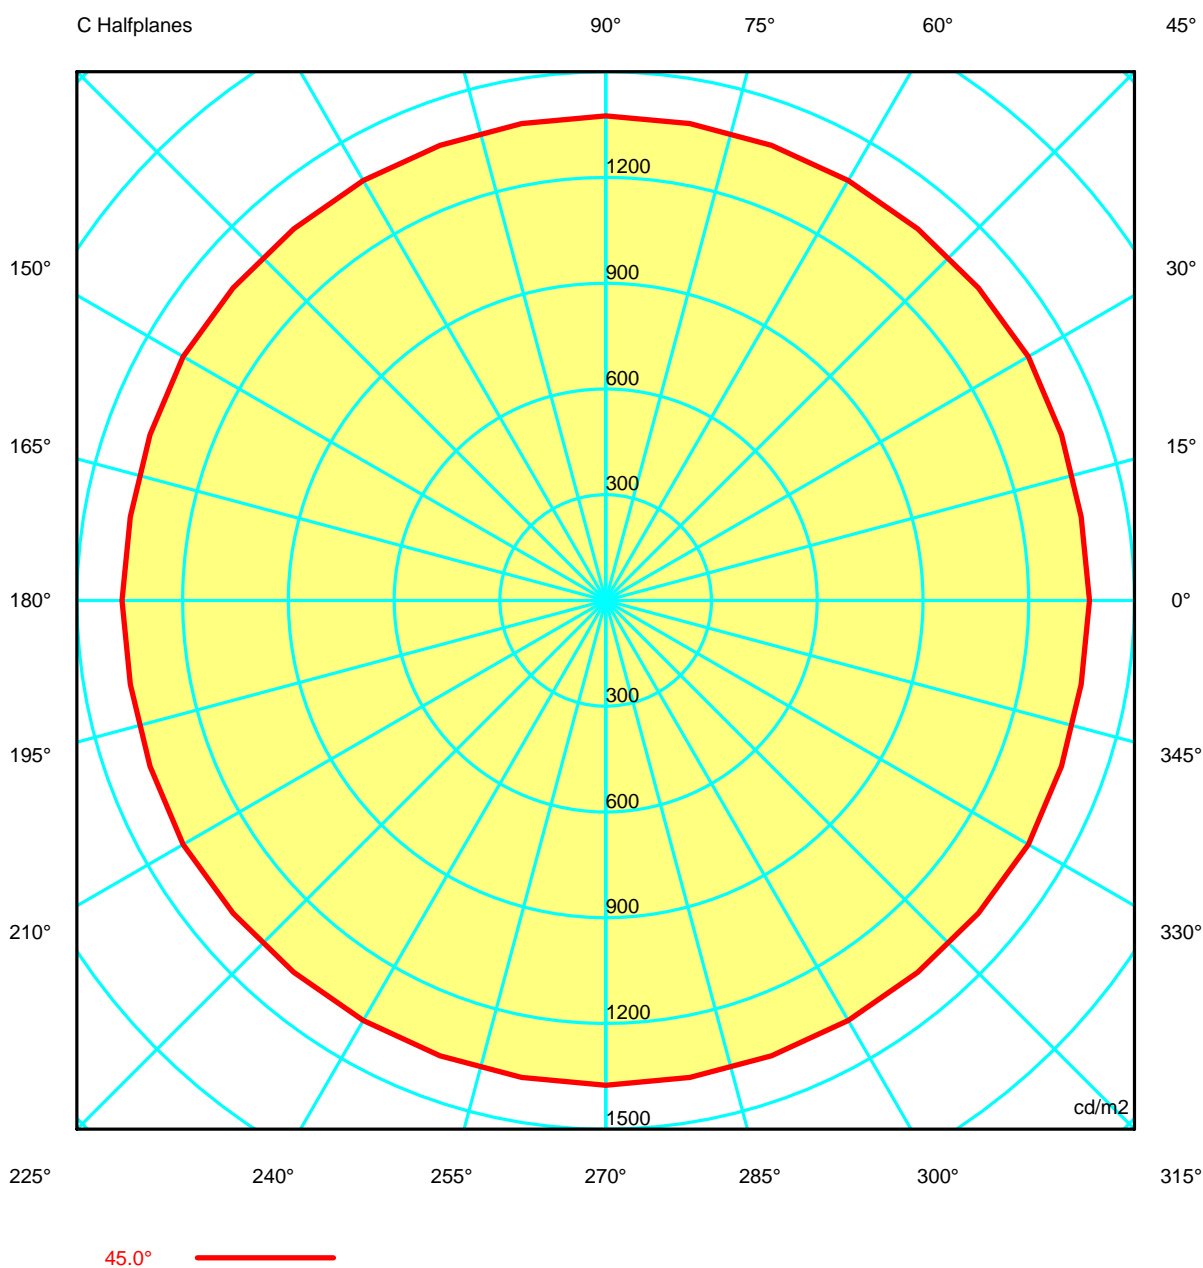

Luminaire				Measurem.				Lamp					
Code	GINGER 32 NEW			Code	GINGER 32 NEW			Code	GINGER 32 NEW				
Name	Colgante leds 9.4W 700mA			Name	Colgante leds 9.4W 700mA			Number	1				
Line	- MARSET			Date	11-02-2015			Position	Universal				
Efficiency	100.00%			Coordinate system	CG			Total Flux	350.26 lm				
Maximum value	267.86 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical					
Luminance cd/m2 Table 1/3													
	C 0.00	C 10.00	C 20.00	C 30.00	C 40.00	C 50.00	C 60.00	C 70.00	C 80.00	C 90.00	C 100.00	C 110.00	C 120.00
G 0.0	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56
G 5.0	1170.12	1170.12	1170.19	1170.31	1170.92	1170.52	1169.48	1169.53	1169.44	1168.57	1169.44	1169.53	1169.48
G 10.0	1179.45	1178.05	1178.61	1180.33	1180.47	1179.55	1178.92	1179.29	1178.97	1177.40	1178.97	1179.29	1178.92
G 15.0	1194.44	1192.97	1194.15	1196.37	1195.33	1194.81	1194.82	1195.00	1194.51	1193.45	1194.51	1195.00	1194.82
G 20.0	1211.19	1209.65	1212.02	1215.74	1214.31	1213.65	1213.77	1213.27	1212.49	1212.05	1212.49	1213.27	1213.77
G 25.0	1235.46	1234.14	1237.28	1241.50	1239.28	1237.89	1238.21	1237.93	1237.49	1237.35	1237.49	1237.93	1238.21
G 30.0	1261.23	1262.37	1265.15	1268.82	1266.78	1265.74	1265.70	1265.43	1265.91	1267.75	1265.91	1265.43	1265.70
G 35.0	1293.91	1291.14	1296.00	1302.88	1299.18	1296.84	1297.39	1297.13	1296.91	1296.73	1296.91	1297.13	1297.39
G 40.0	1335.41	1330.88	1335.99	1343.42	1337.26	1334.94	1337.12	1336.49	1334.63	1334.20	1334.63	1336.49	1337.12
G 45.0	1372.00	1369.19	1375.51	1384.26	1380.09	1376.48	1375.83	1374.60	1373.96	1375.23	1373.96	1374.60	1375.83
G 50.0	1429.97	1425.11	1433.19	1443.56	1434.05	1430.48	1433.50	1430.90	1429.01	1430.55	1429.01	1430.90	1433.50
G 55.0	1476.72	1479.54	1486.59	1495.35	1489.32	1486.27	1490.16	1488.00	1487.01	1490.99	1487.01	1488.00	1490.16
G 60.0	1551.95	1545.30	1557.71	1573.00	1557.76	1550.22	1552.37	1550.34	1548.69	1552.55	1548.69	1550.34	1552.37
G 65.0	1647.50	1627.23	1638.36	1657.76	1634.05	1620.99	1621.98	1620.40	1617.32	1616.04	1617.32	1620.40	1621.98
G 70.0	1723.19	1712.53	1729.56	1751.44	1729.95	1717.02	1716.95	1713.41	1710.76	1714.93	1710.76	1713.41	1716.95
G 75.0	1829.39	1800.69	1839.68	1886.00	1818.47	1784.65	1789.68	1785.37	1788.33	1814.48	1788.33	1785.37	1789.68
G 80.0	1220.28	1239.60	1305.40	1369.26	1330.92	1256.50	1218.75	1234.47	1243.15	1220.45	1243.15	1234.47	1218.75
G 85.0	343.22	348.09	381.78	432.69	386.47	311.43	288.07	334.53	350.23	301.80	350.23	334.53	288.07
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire				Measurem.				Lamp					
Code	GINGER 32 NEW			Code	GINGER 32 NEW			Code	GINGER 32 NEW				
Name	Colgante leds 9.4W 700mA			Name	Colgante leds 9.4W 700mA			Number	1				
Line	- MARSET			Date	11-02-2015			Position	Universal				
Efficiency	100.00%			Coordinate system	CG			Total Flux	350.26 lm				
Maximum value	267.86 cd/klm			Position	C=0.00 G=0.00			Double Symmetrical					
Luminance cd/m2 Table 2/3													
	C 130.00	C 140.00	C 150.00	C 160.00	C 170.00	C 180.00	C 190.00	C 200.00	C 210.00	C 220.00	C 230.00	C 240.00	C 250.00
G 0.0	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56
G 5.0	1170.52	1170.92	1170.31	1170.19	1170.12	1170.12	1170.12	1170.19	1170.31	1170.92	1170.52	1169.48	1169.53
G 10.0	1179.55	1180.47	1180.33	1178.61	1178.05	1179.45	1178.05	1178.61	1180.33	1180.47	1179.55	1178.92	1179.29
G 15.0	1194.81	1195.33	1196.37	1194.15	1192.97	1194.44	1192.97	1194.15	1196.37	1195.33	1194.81	1194.82	1195.00
G 20.0	1213.65	1214.31	1215.74	1212.02	1209.65	1211.19	1209.65	1212.02	1215.74	1214.31	1213.65	1213.77	1213.27
G 25.0	1237.89	1239.28	1241.50	1237.28	1234.14	1235.46	1234.14	1237.28	1241.50	1239.28	1237.89	1238.21	1237.93
G 30.0	1265.74	1266.78	1268.82	1265.15	1262.37	1261.23	1262.37	1265.15	1268.82	1266.78	1265.74	1265.70	1265.43
G 35.0	1296.84	1299.18	1302.88	1296.00	1291.14	1293.91	1291.14	1296.00	1302.88	1299.18	1296.84	1297.39	1297.13
G 40.0	1334.94	1337.26	1343.42	1335.99	1330.88	1335.41	1330.88	1335.99	1343.42	1337.26	1334.94	1337.12	1336.49
G 45.0	1376.48	1380.09	1384.26	1375.51	1369.19	1372.00	1369.19	1375.51	1384.26	1380.09	1376.48	1375.83	1374.60
G 50.0	1430.48	1434.05	1443.56	1433.19	1425.11	1429.97	1425.11	1433.19	1443.56	1434.05	1430.48	1433.50	1430.90
G 55.0	1486.27	1489.32	1495.35	1486.59	1479.54	1476.72	1479.54	1486.59	1495.35	1489.32	1486.27	1490.16	1488.00
G 60.0	1550.22	1557.76	1573.00	1557.71	1545.30	1551.95	1545.30	1557.71	1573.00	1557.76	1550.22	1552.37	1550.34
G 65.0	1620.99	1634.05	1657.76	1638.36	1627.23	1647.50	1627.23	1638.36	1657.76	1634.05	1620.99	1621.98	1620.40
G 70.0	1717.02	1729.95	1751.44	1729.56	1712.53	1723.19	1712.53	1729.56	1751.44	1729.95	1717.02	1716.95	1713.41
G 75.0	1784.65	1818.47	1886.00	1839.68	1800.69	1829.39	1800.69	1839.68	1886.00	1818.47	1784.65	1789.68	1785.37
G 80.0	1256.50	1330.92	1369.26	1305.40	1239.60	1220.28	1239.60	1305.40	1369.26	1330.92	1256.50	1218.75	1234.47
G 85.0	311.43	386.47	432.69	381.78	348.09	343.22	348.09	381.78	432.69	386.47	311.43	288.07	334.53
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Luminaire			Measur.			Lamp				
Code	GINGER 32 NEW		Code	GINGER 32 NEW		Code	GINGER 32 NEW			
Name	Colgante leds 9.4W 700mA		Name	Colgante leds 9.4W 700mA		Number	1			
Line	- MARSET		Date	11-02-2015		Position	Universal			
Efficiency			100.00%		Coordinate system	CG		Total Flux	350.26 lm	
Maximum value			267.86 cd/klm		Position	C=0.00 G=0.00		Double Symmetrical		
Luminance cd/m2 Table 3/3										
	C 260.00	C 270.00	C 280.00	C 290.00	C 300.00	C 310.00	C 320.00	C 330.00	C 340.00	C 350.00
G 0.0	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56	1166.56
G 5.0	1169.44	1168.57	1169.44	1169.53	1169.48	1170.52	1170.92	1170.31	1170.19	1170.12
G 10.0	1178.97	1177.40	1178.97	1179.29	1178.92	1179.55	1180.47	1180.33	1178.61	1178.05
G 15.0	1194.51	1193.45	1194.51	1195.00	1194.82	1194.81	1195.33	1196.37	1194.15	1192.97
G 20.0	1212.49	1212.05	1212.49	1213.27	1213.77	1213.65	1214.31	1215.74	1212.02	1209.65
G 25.0	1237.49	1237.35	1237.49	1237.93	1238.21	1237.89	1239.28	1241.50	1237.28	1234.14
G 30.0	1265.91	1267.75	1265.91	1265.43	1265.70	1265.74	1266.78	1268.82	1265.15	1262.37
G 35.0	1296.91	1296.73	1296.91	1297.13	1297.39	1296.84	1299.18	1302.88	1296.00	1291.14
G 40.0	1334.63	1334.20	1334.63	1336.49	1337.12	1334.94	1337.26	1343.42	1335.99	1330.88
G 45.0	1373.96	1375.23	1373.96	1374.60	1375.83	1376.48	1380.09	1384.26	1375.51	1369.19
G 50.0	1429.01	1430.55	1429.01	1430.90	1433.50	1430.48	1434.05	1443.56	1433.19	1425.11
G 55.0	1487.01	1490.99	1487.01	1488.00	1490.16	1486.27	1489.32	1495.35	1486.59	1479.54
G 60.0	1548.69	1552.55	1548.69	1550.34	1552.37	1550.22	1557.76	1573.00	1557.71	1545.30
G 65.0	1617.32	1616.04	1617.32	1620.40	1621.98	1620.99	1634.05	1657.76	1638.36	1627.23
G 70.0	1710.76	1714.93	1710.76	1713.41	1716.95	1717.02	1729.95	1751.44	1729.56	1712.53
G 75.0	1788.33	1814.48	1788.33	1785.37	1789.68	1784.65	1818.47	1886.00	1839.68	1800.69
G 80.0	1243.15	1220.45	1243.15	1234.47	1218.75	1256.50	1330.92	1369.26	1305.40	1239.60
G 85.0	350.23	301.80	350.23	334.53	288.07	311.43	386.47	432.69	381.78	348.09
G 90.0	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00