

MATIN WALL

PRODUCT FACT SHEET



HAY

MATIN WALL


DESIGN BY INGA SEMPÉ, 2021

Designed by Inga Sempé, the Matin Wall Lamp offers a contemporary yet poetic design, with a construction that combines visual delicacy with physical robustness. The head of the lamp can be angled approximately 45 degrees both upwards and downwards to create an ambient uplight as well as directional downlight. The wall-mounted design consists of a steel wire bent frame finished in polished brass with matte black hardware and is paired with a pleated cotton shade in two sizes with a variety of vibrant colours. The light source is an integrated LED, offering a diffused light which is accompanied by a digital in-line dimmer control to adjust the output of light if required.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of contemporary table, ceiling and wall lamps.
- Elegant wall-mounted lamp with a steel wire bent frame, paired with a pleated cotton shade in different colours.
- Shares the same shades as the table lamp variants and can easily be changed.
- The head of the lamp has an adjustable angle to direct light up or down.
- CE approved.
- Integrated LED light source ensuring a life span of at least 25,000 hours of use.
- Inline step dimmer.
- Available in two sizes and suitable for both private and office environments.

DIMENSIONS

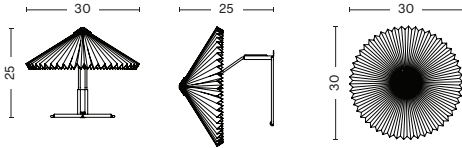

MATIN WALL 300
WIDTH 30 CM | 11.81"
DEPTH 25 CM | 9.84"
HEIGHT 30 CM | 11.81"

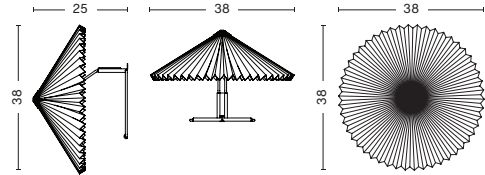

MATIN WALL 380
WIDTH 38 CM | 14.96"
DEPTH 25 CM | 9.84"
HEIGHT 38 CM | 14.96"

MATERIALS

SHADE

Cotton fabric laminated to a PVC sheet.
Black top screw in injection moulded ABS.

BODY

Bent steel wire with polished brass finish, precision cast steel counter weight and injection moulded ABS.

CORD

Black silicone cable.

INLINE SWITCH

Injection moulded ABS.

COLOUR & FINISH

Please note that the colour codes are indicative.



WHITE
RAL 9010



LAVENDER
PANTONE 7445C



YELLOW
PANTONE 109U



OXIDE RED
PANTONE 7609C



BRIGHT RED
PANTONE 2035U



GREEN
PANTONE 7729U

TECHNICAL SPECIFICATIONS


LIGHT SOURCE Integrated LED, 5W, 150lm, 2800K warm white	DIMMABLE Yes	POWER SUPPLY 220-240V AC at 50/60Hz	IP 20	CORD LENGTH 200 cm	SWITCH Inline step dimmer. Located 50 cm from lamp base.
---	-----------------	--	----------	-----------------------	--

TEST SPECIFICATIONS*

FLUX (LUMENS) 150lm	CCT (KELVIN) 2800K, warm white	CRI (1-100) 85
------------------------	-----------------------------------	-------------------

*Photometrics and the specification shown is taken using the integrated LED bulb fitted in the production luminaire.

PHOTOMETRICS

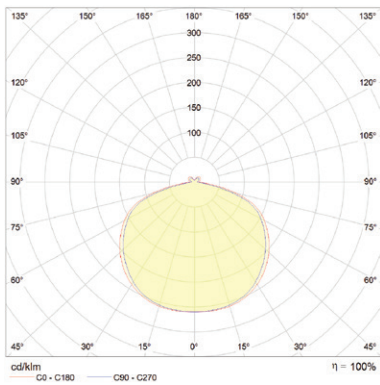

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following european EN / IEC standards which relate specifically to electrical lighting products including

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO IMAGE BANK](#)