

NELSON WALL SCONCE

PRODUCT FACT SHEET



1

NELSON WALL SCONCE


DESIGN FOR HERMAN MILLER, AVAILABLE FROM HAY, 1947

Designed by pioneering American designer George Nelson in 1947, and first produced in 1952, the Bubble Lamp signaled a revolution in the Modernist lighting industry. Available in an assortment of organic sizes and shapes, these elegant orbs were inspired by a set of silk-covered Swedish pendant lamps Nelson wanted for his office, but found to be too expensive. Employing the resourcefulness that characterized his working process, he decided to use a self-webbing plastic spray developed by the U.S. military, and applied it over a lightweight, rounded-steel frame to produce these soft, glowing fixtures.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A family of refined wall sconces.
- CE approved.
- Suitable for both private and office environments.


DIMENSIONS




NELSON BALL WALL SCONCE CABLED | SMALL
DIAMETER SHADE 32,5 CM | 12.8"
DEPTH 53,5 CM | 21.06"
HEIGHT SHADE 30,5 CM | 12"
HEIGHT TOTAL 42.5 CM | 16.73"



NELSON CIGAR WALL SCONCE CABLED | SMALL
DIAMETER SHADE 26,5 CM | 10.43"
DEPTH 50,5 CM | 19.9"
HEIGHT SHADE 35,5 CM | 12"
HEIGHT TOTAL 42.5 CM | 14"



NELSON PEAR WALL SCONCE CABLED | SMALL
DIAMETER SHADE 33 CM | 13"
DEPTH 53 CM | 20.9"
HEIGHT SHADE 32 CM | 12.6"
HEIGHT TOTAL 42.5 CM | 16.73"

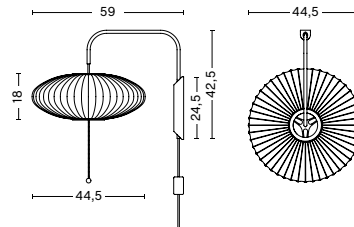

NELSON SAUCER WALL SCONCE CABLED | SMALL
DIAMETER SHADE 44,5 CM | 10.43"
DEPTH 59 CM | 23.23"
HEIGHT SHADE 18 CM | 7.1"
HEIGHT TOTAL 42.5 CM | 16.73"

MATERIALS

SHADE

Webbing polymer.

FRAME TOP & BOTTOM RING

Coated and brushed metal and nickel.

CORD

White PVC insulation.

All Bubble Lamp models have a steel-wire skeleton on the interior which is spray coated with the translucent plastic polymer resulting in a lamp that is both opaque and transparent as it glows.

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	POWER (WATTS)	DIMMABLE	POWER SUPPLY	CORD LENGTH	SWITCH
LED E27 (A15)	5-8W	No	220-240V AC at 50/60Hz polarized plug and cable included.**	366 cm	Pull switch

*Bulb not included.

**EU/UK adaptors not included.

TEST SPECIFICATIONS*

FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
500-800lm	The levels will vary depending on the type of bulb used in the lamp.

*Photometrics and the specification shown is taken using the recommended LED bulbs fitted in the production luminaire.

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.

LED  IP20  

Tested according to the following european EN IEC standards which relate specifically to electrical lighting products including

- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)

COUNTRY OF ORIGIN

USA

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Image Bank at hay.com.

[LINK TO DIGITAL LIBRARY](#)