


# PH 4½-3½ FLOOR LAMP

PH 4½-3½ Floor Lamp - 5744161514

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of mouth-blown opal three-layer glass, which is glossy on top and sandblasted matt on the underside, giving a soft and diffused light distribution.



## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



**Muratajyuki Inc.**



**Sydbank**

## Product info

### Mounting

3.3 m. Cord with plug. On/off foot switch provided.

### Finish

High lustre chrome plated. White opal glass.

### Materials

Shades: Mouth-blown white opal glass. Anti glare ring: Purple, spun aluminium. Top plate: High lustre chrome plated, spun brass. Base: High lustre chrome plated, spun brass. Stem: High lustre chrome plated, steel.

### Sizes and weights

width x Height x Length (mm) | 450 x 1260 x 450 Max 15.6 kg

### Class

Ingress protection IP20. Electric shock protection II w/o ground.

### Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

### Light source

1x100W E27



## Related products



PH 5




PH 4½-4 Pendant




PH 4½-3½ Table Lamp

# Light distribution diagrams


## Cartesian

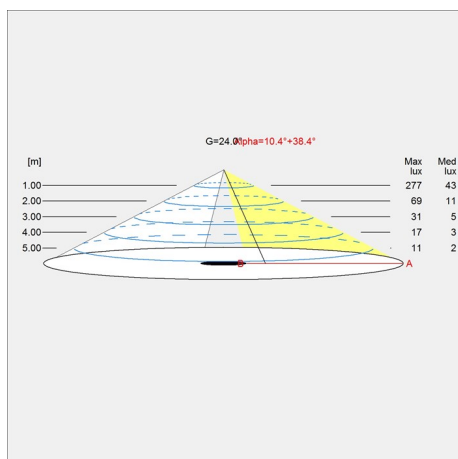

## Isolux

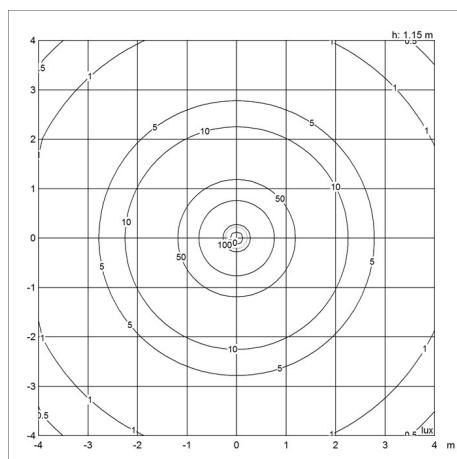

## Polar

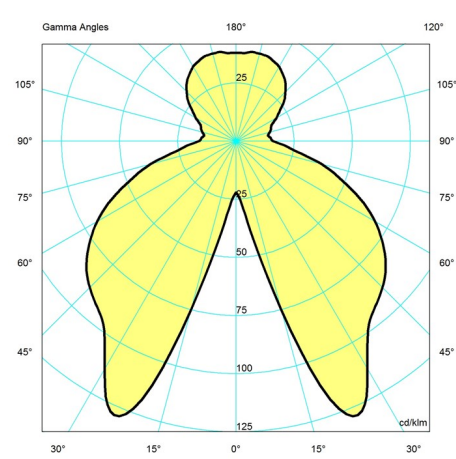

## Spare parts & accessories

Product	Variant number
Finger screw SS M3X12 (3pcs) lower	5744610528
PH 4½-3½ middle shade Opal glass	5744610612
PH 4½-3½ lower shade Opal glass	5744610625
PH 4½-3½ top shade Opal glass	5744610722
Finger screw SS M3X16 (3pcs) middle	5744610845
Black foot switch	5717000000

## Data specifications

Colour	High lustre chrome plated	Length	450
Width	450	Height	1260
Built-in Height	-	IP class	20
Class	II	Net Weight	15.6
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x100W E27

## PH 4½-3½ Floor Lamp

Kelvin	-
SDCM	-
Watt	150
Light control	-
UGR Transversal / Axial	14.4/14.4
Driver life	-

CRI	-
Lumen	1225
Efficacy	8
Min. Dim Level (%)	-
L80B50 (hours)	-