



AJ Royal

AJ Royal - 5741104493

The pendant comes in three sizes and is characterised by the ridges on top that allow a gentle light to exude upwards. The new, energy-saving LED version comes with a diffuser, which offers a smoother, 100% glare-free lighting.

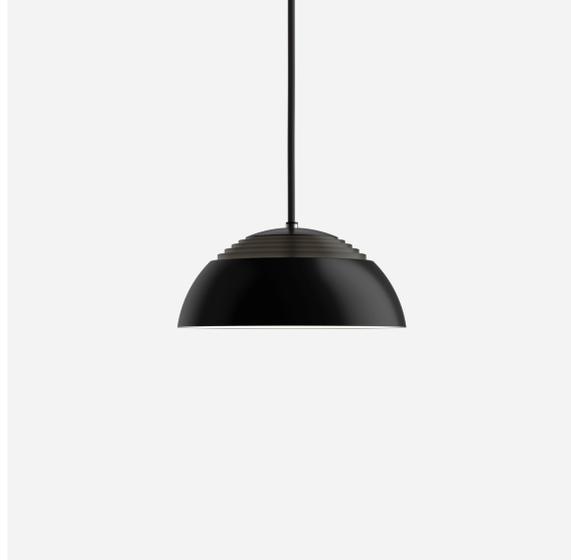

Arne Jacobsen

Arne Jacobsen was born and raised in Copenhagen. In 1927, he graduated as an architect from the Royal Danish Academy of Fine Arts in Copenhagen. After graduating, he obtained his first job at the office of the City Architect of Copenhagen launching his own office only two years later.



Product info

Information

The white version is supplied with a white cable and the black version is supplied with a black cable. Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

Mounting

Suspension type: Cable 2x0,75mm². Canopy: Yes. Cable length: 4m.

Finish

White or black, wet painted.

Materials

Shades: Spun aluminium. Rings: Steel. Diffuser: Frosted acrylic

Sizes and weights

Width x Height x Length (mm) | 370 x 181 x 370 Max 1.9 kg | 500 x 225 x 500 Max 5.8 kg | 250 x 115 x 250 Max 2.4 kg

Class

Ingress protection IP20. Electric shock protection I w/ ground.

Light source

LED 2700K 8W
Lumen: 508

Information

The white version is supplied with a white cable and the black version is supplied with a black cable. Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.



Product family




AJ Mini Table



AJ Table



AJ Wall




AJ Floor




AJ 50 Wall

Light distribution diagrams


Cartesian

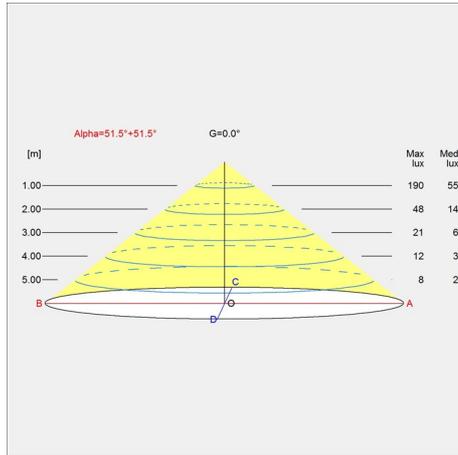

Isolux

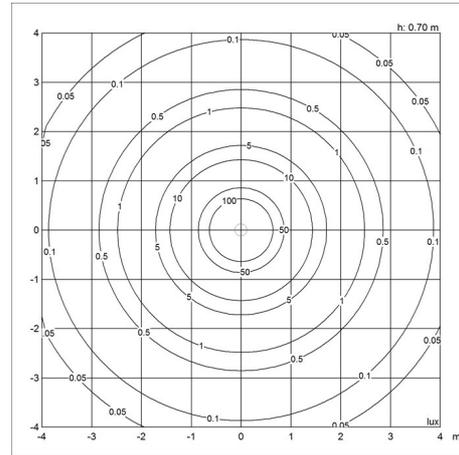

Polar

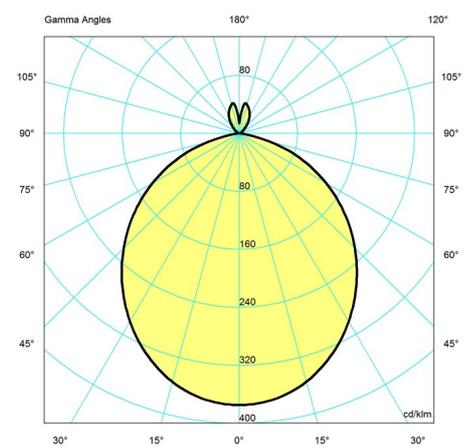

Data specifications

Colour	Black	Length	250
Width	250	Height	115
Built-in Height	-	IP class	20
Class	I	Net Weight	1.2
Standby (W)	>0,5	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	5 A / 50 µs	Light source	LED 2700K 8W
Kelvin	2700	CRI	90
SDCM	3	Lumen	508
Watt	8.0	Efficacy	64
Light control	Dali	Min. Dim Level (%)	1
UGR Transversal / Axial	17.7/17.7	L80B50 (hours)	>50000
Driver life	50000		