

VL Ring Crown 1

VL Ring Crown 1 - 5741094367

The pendant emits light directed primarily downwards.
The opal glass provides a comfortable and uniform illumination of the area around the fixture.



Vilhelm Lauritzen

Vilhelm Lauritzen (1894–1984) is one of the most significant architects in the history of Denmark; he was the trail-blazing figurehead of Danish functionalism. A number of his buildings – Nørrebro Theatre (1931–32), Daells Varehus department store (1928–35), Radihuset (1936–41) and the first airport built in Kastrup (1937–39) – represented the concentrated essence of contemporary life.



Set location -
The Silo



Product info

Environmental Product Specification

This product is compliant with the requirements contained in the European Directives, RoHS Directive 2011/65 and 2015/863. This product is designed so that 100% of the product can be disassembled and reused.

Information

Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.

Mounting

Cable 2x0,75mm². Canopy: Yes. Cable length: 3m.

Finish

Glossy, mouthblown white opal glass. Satin polished brass, untreated.

Materials

Shades: Mouth-blown, 3-layered, polished opal glass. Suspension: Untreated brass, will patinate.

Sizes and weights

Width x Height x Length (mm) | 190 x 342 x 190 Max 1.2 kg

Class


Ingress protection IP20. Electric shock protection II w/o ground.

Light source


1x40W E27

Information


Please note that the brass surfaces are untreated. This means that the surface will change over time and develop a patina.

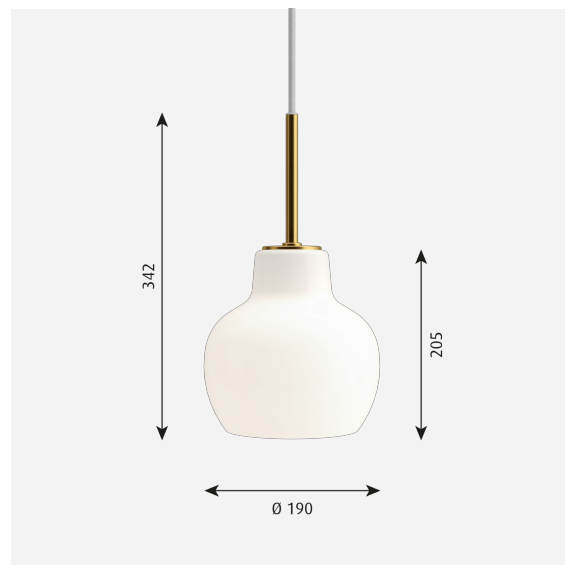

Product family



VL Ring Crown 3-5-7



VL Ring Crown Wall

Spare parts & accessories

Product	Variant number
Canopy White 2-part tophat ®	5749329034
VL Ring crown 1 spare glass	5741094419

Data specifications

Colour	Brass/glossy opal glass	Length	190
Width	190	Height	342
Built-in Height	-	IP class	20
Class	II	Net Weight	1.2
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x40W E27
Kelvin	-	CRI	-
SDCM	-	Lumen	-
Watt	-	Efficacy	-
Light control	-	Min. Dim Level (%)	-
UGR Transversal / Axial	-	L80B50 (hours)	-
Driver life	-		