# **Above**

Above - 5741099391

The fixture emits soft comfortable downlight. The conical shape and the matt, white-painted inside help assure even distribution of the light. The opening in the top of the fixture provides decorative illumination of the arch above, and ensures that the fixture retains the full expression of its visual shape both when illuminated and when switched off.





## Mads Odgård

The Danish designer Mads Odgård (1960 to present), is a leading figure in a new generation of international designers. He is a minimalist and a 'less is more' man, who would rather deduct than add. More than anything, he believes that excellent design must be logical and functional if it is to endure.



Set location: Alpha Dominche



### Above

### **Product info**

#### Information

 $\varnothing$ 400 & 550 LED: Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.  $\varnothing$ 400 & 550 LED variants are delivered with antiglare shade included. For all other variants the antiglare shade can be purchased as an accessory.

#### Mounting

Suspension type: Cable 2x0,75mm² (Ø175/250) Cable 2x1,00mm² (Ø400 E27) Cable 2x1,5mm² (Ø400 LED). Cable 2x0,75mm² with wire (Ø550). Canopy: Yes. LED canopy contains driver. Cable length: 3m (Ø175/250/400 (E27)), 4m (Ø400 (LED)/Ø550).

#### Finish

White, matt or Black, matt, wet painted.

#### Materials

Shade: Spun aluminium.

#### Sizes and weights

Width x Height x Length (mm) |  $550 \times 660 \times 550 \text{ Max} 5.5 \text{ kg}$  |  $175 \times 210 \times 175 \text{ Max} 0.6 \text{ kg}$  |  $250 \times 300 \times 250 \text{ Max} 1.0 \text{ kg}$  |  $400 \times 480 \times 400 \text{ Max} 4.0 \text{ kg}$ 

#### Class

Ingress protection IP20. Electric shock protection II w/o ground (E27). Electric shock protection I w. ground. (LED)

#### Light source

1x100W E27

#### Information


 $\emptyset$ 400 & 550 LED: Compatible with leading and trailing edge mains dimmers. Please note that low power consumption on some products can affect dimming properties.

Ø400 & 550 LED variants are delivered with antiglare shade included. For all other variants the antiglare shade can be purchased as an accessory.





# Light distribution diagrams

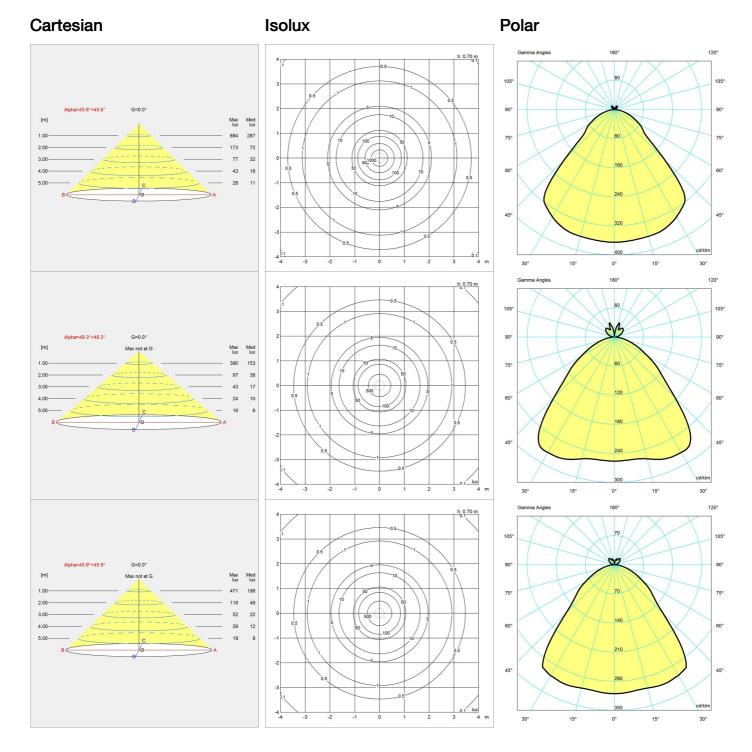



## Spare parts & accessories

Product	Variant number
Canopy Black 2-part tophat®	5749329021
ABOVE 250 PEND ANTI-GLARE SHADE MATT	5741910483
ABOVE 400/550 PEND ANTI-GLARE SHADE MATT	5741910496

## **Data specifications**

Colour	White
Width	400
Built-in Height	-
Class	II
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	17.8/17.8
Driver life	-

Length	400
Height	480
IP class	20
Net Weight	2.4
Power Factor (P = 100 % / P = 50 %)	-
Light source	1x100W E27
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-

