

# Patera Oval


Patera Oval - 5741105939

The pendant is a glowing ellipsoid made up of diamond-shaped cells. Each cell has been carefully designed to capture light and to conceal the light source from viewing angles above 40 degrees. Below 40 degrees the lamp allows direct, downward light. The round opening underneath provides direct light with a soft transition towards the reflected light. The pendant can be used with or without a diffuser plate, depending on whether the view of the light source creates an unwanted glare or not.



## Øivind Slaatto

Øivind Slaatto (born 1978) is a promising Danish designer, recognised for his simple and poetic solutions. Nature is Øivind's most important source of inspiration. He also seeks to transfer characteristics such as rationality, logic and harmony to his designs.

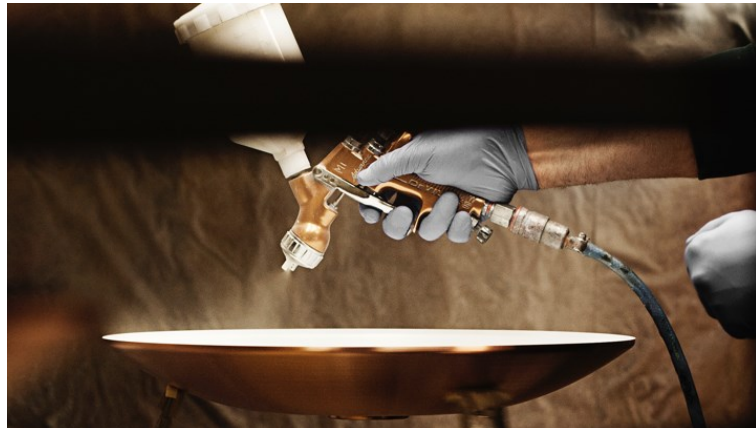

## Product info

### Information

Diffuser plate for bottom opening included.

### Mounting

Cable: White textile, 2 x 0.75mm<sup>2</sup>. Canopy: Yes. LED: Canopy contains driver. Cable length: 4 m.

### Finish

White, matt.

### Materials

Shade: Cut matt PVC foil. Frame: White, opal, matt coated, Injection moulded polycarbonate. Suspension E-socket: White, opal, matt coated, Injection moulded polycarbonate. Suspension LED: Matt white, Die cast aluminum Diffuser plate: Injection moulded polycarbonate.

### Sizes and weights

Width x Height x Length (mm) | 500 x 291 x 500 Max 2.6 kg

### Class

Ingress protection IP20. Electric shock protection I w. Ground (LED). Electric shock protection II. w/o ground (E-socket).

### Light source

1x40W E27

### Information

Diffuser plate for bottom opening included.




## Product family




Patera

# Light distribution diagrams


Cartesian

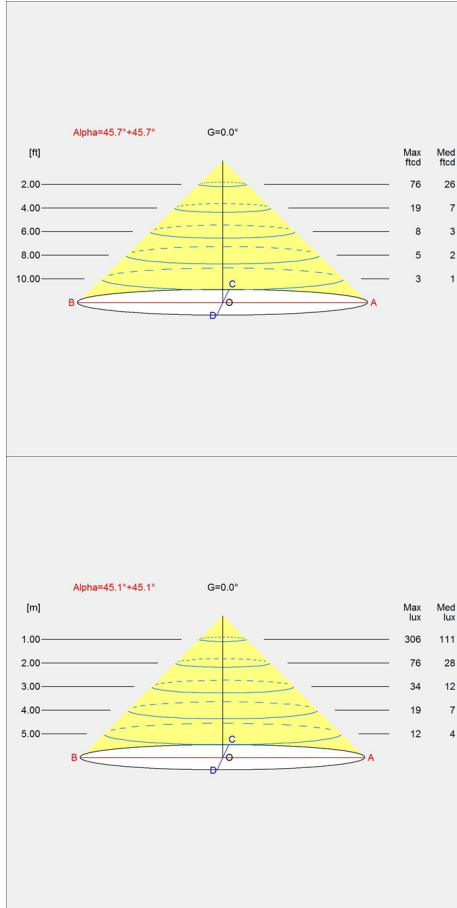

Isolux

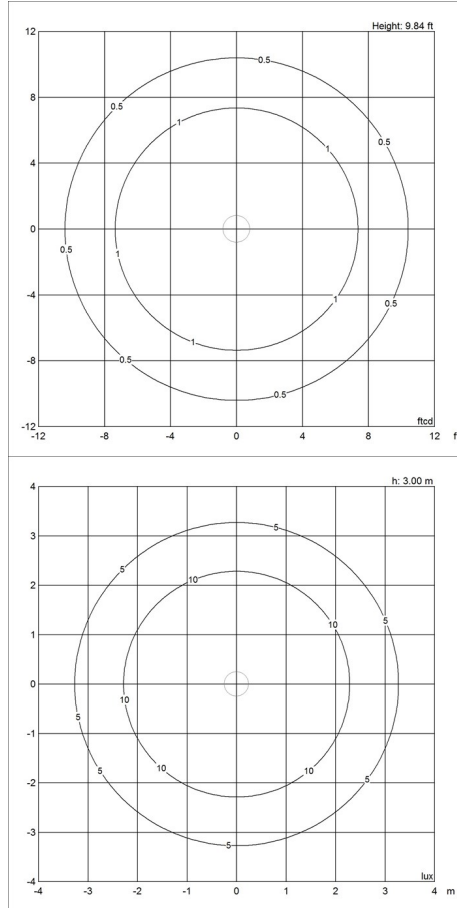

Polar

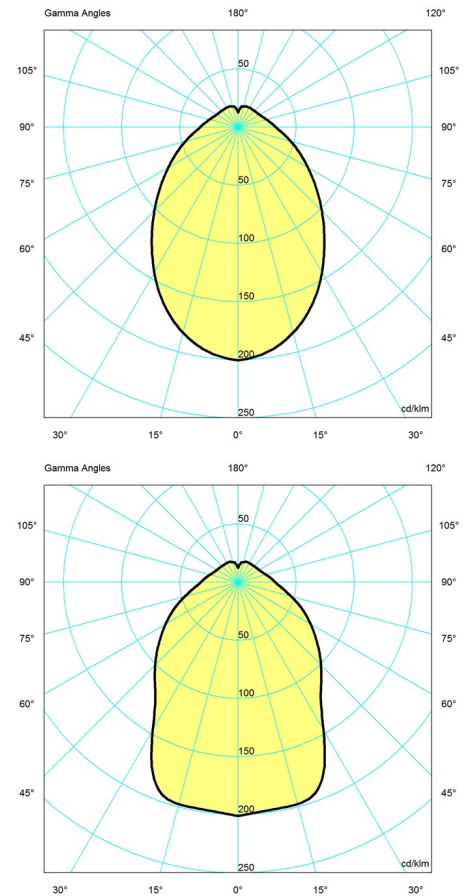

## Spare parts & accessories

**Product**

Canopy White 2-part tophat ©  
PATERA OVAL SUSP 500 40W E27

**Variant number**

5749329034  
5741105968

## Data specifications

Colour

White matt

Length

500

**Patera Oval**

Width	<b>500</b>
Built-in Height	-
Class	-
Standby (W)	-
Inrush Current	-
Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	<b>13.3/13.3</b>
Driver life	-

Height	<b>291</b>
IP class	<b>20</b>
Net Weight	<b>1.5</b>
Power Factor (P = 100 % / P = 50 %)	-
Light source	<b>1x40W E27</b>
CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-