


# PH 4/3 Pendant

PH 4/3 Pendant - 5741087549

The fixture is designed based on the principle of a reflective three-shade system, which directs the majority of the light downwards. The shades are made of metal and painted white to ensure uniform, comfortable light distribution.



## Poul Henningsen

Poul Henningsen was born in Copenhagen by the famous Danish writer Agnes Henningsen. He never graduated as an architect, but studied at The Technical School at Frederiksberg, Denmark from 1911-14, and then at Technical College in Copenhagen from 1914-17.



## Product info

### Mounting

Suspension type: Cable 3x0,75mm<sup>2</sup>. Canopy: Yes. Cable length: 3m.

### Finish

White, powder coated.

### Materials

Shades: Spun aluminium. Anti-glare disc: White, spun aluminium.

### Sizes and weights

Width x Height x Length (mm) | 400 x 200 x 400 Max 1.1 kg

### Class

Ingress protection IP20. Electric shock protection I w. ground.

### Specification notes

The innovation of light sources is ongoing. Consequently we only inform about the max. wattages. On [www.louispoulsen.com](http://www.louispoulsen.com) we update a list of recommendable light sources.

### Light source

1x60W E27




## Product family




PH 4/3 Table

# Light distribution diagrams


## Cartesian

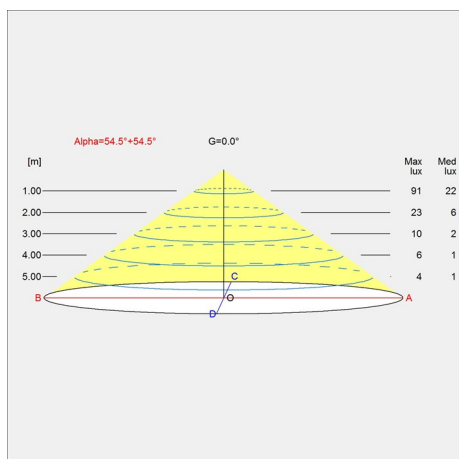

## Isolux

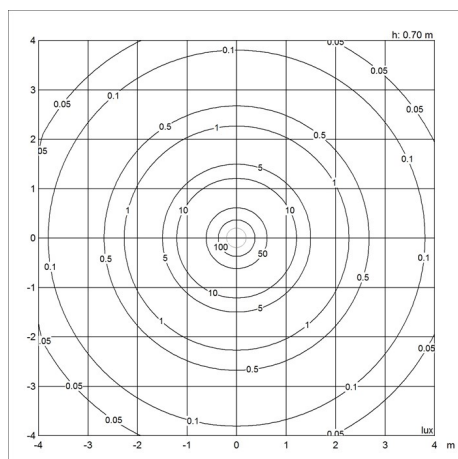

## Polar

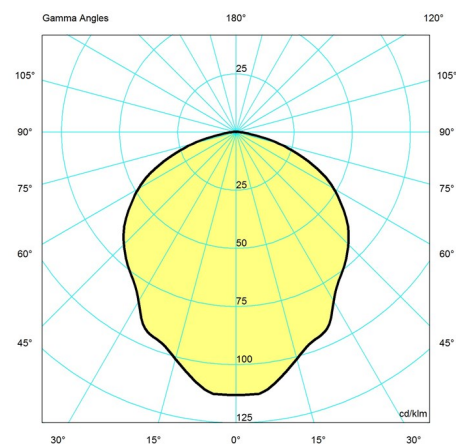

## Spare parts & accessories

### Product

Canopy White 2-part tophat ©  
 PH 4-3, cover plate white  
 PH 4-3, cover plate white new  
 Bearing plate 18/56 F/Standard susp.  
 PH 4-3, cover plate orange f/old version

### Variant number

5749329034  
 5741086841  
 5741087552  
 5741481190  
 5741480997

## Data specifications

Colour	White	Length	400
Width	400	Height	200
Built-in Height	-	IP class	20
Class	I	Net Weight	1.1
Standby (W)	-	Power Factor (P = 100 % / P = 50 %)	-
Inrush Current	-	Light source	1x60W E27

**PH 4/3 Pendant**

Kelvin	-
SDCM	-
Watt	-
Light control	-
UGR Transversal / Axial	<b>14.8/14.8</b>
Driver life	-

CRI	-
Lumen	-
Efficacy	-
Min. Dim Level (%)	-
L80B50 (hours)	-